



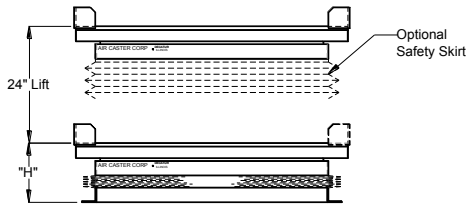

PNEUMATIC LIFT & ROTATES


**BULLETIN
NO. 106J**

Plant air operated.
Requires 85 psi for
maximum rated load.

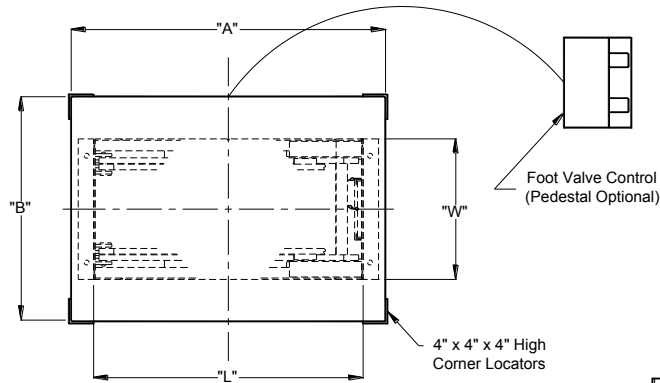

AIR CASTER ROTATE (A.C.)

- Lowest rotational forces.
- Locks in position with air off.

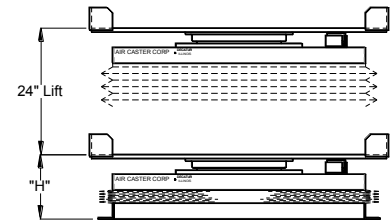

MECHANICAL ROTATE (MECH.)

- For off-center loads.
- Pneumatic brake to hold position.

OFFERING - LIFT AND ROTATES

MODEL NO.	TYPE	CAPACITY (POUNDS)	DECK SIZE (in.)		BASE SIZE (in.)		LOWERED HEIGHT	WEIGHT POUNDS
			A	B	L	W		
LR2-M3636	MECH.	2,000	36	36	42	25	12¼	1,080
LR2-M4648	MECH.	2,000	48	46	48	42	12¼	1,290
LR2-A4648	A.C.	2,000	48	46	48	42	12¼	1,250
LR2-M4856	MECH.	2,000	56	48	48	42	12¼	1,385
LR2-A4856	A.C.	2,000	56	48	48	42	12¼	1,335
LR4-M4648	MECH.	4,000	48	46	48	42	12¼	1,415
LR4-A4648	A.C.	4,000	48	46	48	42	12¼	1,395
LR4-M4856	MECH.	4,000	56	48	48	42	12¼	1,510
LR4-A4856	A.C.	4,000	56	48	48	42	12¼	1,460
LR6-M4648	MECH.	6,000	48	46	56	48	13¾	1,440
LR6-A4648	A.C.	6,000	48	46	56	48	14½	1,400
LR6-M4856	MECH.	6,000	56	48	56	48	13¾	1,540
LR6-A4856	A.C.	6,000	56	48	56	48	14½	1,490

OFFERING - LOW HEIGHT LIFT AND ROTATES

MODEL NO.	TYPE	CAPACITY (POUNDS)	DECK SIZE (in.)		BASE SIZE (in.)		LOWERED HEIGHT	WEIGHT POUNDS
			A	B	L	W		
LR2-M3636LH	MECH.	1,500	36	36	44	24½	8⅜	760
LR2-M4648LH	MECH.	1,500	46	48	44	24½	8⅜	950
LR4-M4648LH	MECH.	3,500	46	48	44	39	8⅜	1,100
LR4-M4856LH	MECH.	3,500	48	56	44	39	8⅜	1,160

ACCESSORIES

Safety Skirt - Wire reinforced accordion safety skirt for four (4) sides of lift. **Safety Pilot Operated Check Valve** - This check valve will prevent the lift from lowering in the event of a ruptured or severed air hose. To order specify **Check Valve No. CV-38**.