


COMPACT, EASY TO USE DRIVE UNIT

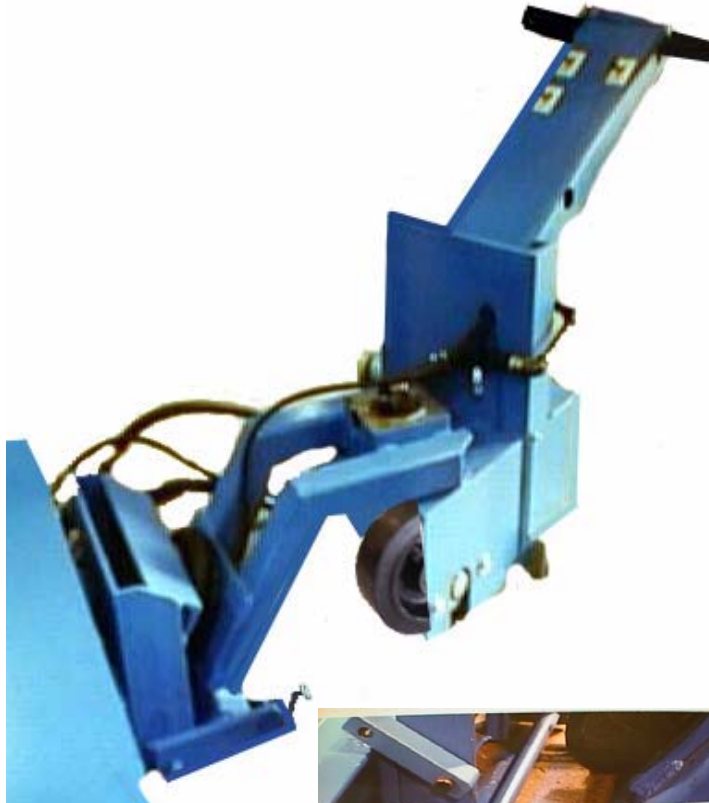

SAFE – Spring return to center “off” position brakes movement.

SINGLE OPERATOR – Safely, and effortlessly moves heavy loads.

MAXIMUM MANEUVERABILITY – Drive provides full 180° steering, allowing platform to be rotated about its center.

EASY OPERATION – Hand grip twists for forward-reverse control. Speed increases as grip is twisted.

SNAP-ON-ATTACHMENT – Allows one drive tractor to be used with a number of platforms.



QUICK ATTACHMENT

- 1) Fork on drive frame engages pin on platform bracket
- 2) Outside arm swings down to clamp tractor to platform
- 3) Connect drive air line

MODEL NO.	DRAW BAR PULL (lbs.)	SPEED (FPM)	AIR CONSUMPTION (CFM)	USE WITH AIR CASTER EQUIPMENT WITH LOADS UP TO:	MOUNTING BRACKET* PART NO.
DT-6	600	0-30	40	40,000 lbs.	DT-6B
DT-12	1,200	0-20	80	100,000 lbs.	DT-12B

* ONE BRACKET SUPPLIED WITH DRIVE TRACTOR

OTHER DRIVE UNITS

Non-steering drives for guided, straight line load movement, and other air motor drive configurations are available. Consult factory.